

- suitable for TASCAM™, MACKIE, YAMAHA, FOCUSRITE...
 - PW..X, Ø 0.22 mm², high flexible studio multicore, XLPE insulation (cross-linked PE)
 - D-Sub 25p. male, metal shell
 - XLR 3p. female - sparkling bronze metallic plastic shell
 - heat shrink clear, both-sided for free labelling
 - additional screws M 2.5 for YAMAHA (Europa)
- geeignet für TASCAM™, MACKIE, YAMAHA, FOCUSRITE...
 - PW..X, Ø 0.22 mm², hochflexibles studio anschluss kabel, XLPE isolation (vernetztes polyethylen)
 - D-Sub 25p. male, metall gehäuse
 - XLR 3p. female - sparkling bronze metall plastik gehäuse
 - schrumpfschlauch transparent, beidseitig zur freien beschriftung
 - zusätzliche D-Sub schrauben M 2.5 für YAMAHA (Europa)




technical data

cable	
channels	8
cable typ	PW..X, Ø 0.22 mm ² , high flexible studio multicore, XLPE insulation (cross-linked PE)
jacket	PVC, soft, matt
connectors	
connector 1	D-Sub 25p. male, metal shell
contact 1	gold-plated
colour code	white
connector 2	XLR 3p. female - sparkling bronze metallic plastic shell
contact 2	silver-plated
manufacturer	Neutrik
screw joint	UNC 4-40

technische daten

kabel	
kanäle	8
kabeltyp	PW..X, Ø 0.22 mm ² , hochflexibles studio anschluss kabel, XLPE isolation (vernetztes polyethylen)
mantel	PVC, soft, matt
steckverbinder	
anschluss 1	D-Sub 25p. male, metall gehäuse
kontakt 1	vergoldet
farbcode	weiß
anschluss 2	XLR 3p. female - sparkling bronze metall plastik gehäuse
kontakt 2	versilbert
hersteller	Neutrik
verschraubung	UNC 4-40

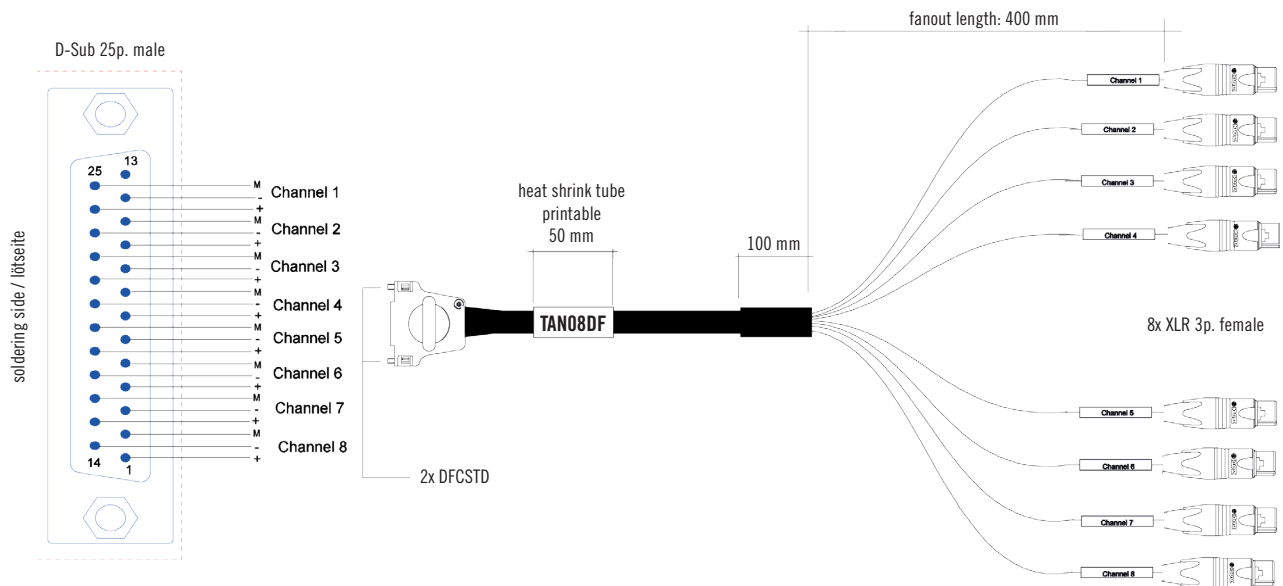

order / variations

bestellung / variationen

order code bestell-nr.	connector 1 anschluss 1	connector 2 anschluss 2	colour farbe	length länge [m]	fanout length spleißlänge [mm]
TAN08DF01.0	D-Sub 25p. male	8x XLR 3p. female, Neutrik	black / schwarz	1	400
TAN08DF03.0	D-Sub 25p. male	8x XLR 3p. female, Neutrik	black / schwarz	3	400
TAN08DF05.0	D-Sub 25p. male	8x XLR 3p. female, Neutrik	black / schwarz	5	400