


## S3218A

3 low-pass filters (80Hz, 100Hz, 120Hz) in S3218A are available to choose according to different venues and music styles. There is also phase switch. All connectors and function buttons are on the back panel.

S3218A subwoofer is with 1-way XLR for input and output. Signals can be sent to different speakers for sound distribution.

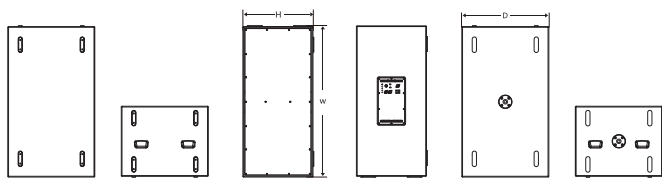

Dimension(W×H×D): 1206×565×694mm




### FEATURES

- Maximum SPL 140dB
- Customized driver
- Built in DSP with 48kHz signal sampling frequency
- Class D amplifier
- Advanced cooling system in the driver
- Optimized, compact and light weight cabinet design for easy usage
- Comprehensive accessories for different applications



### ACCESSORIES



**Flightcase**(customized)  
For 1 cabinet, with 100mm wheels

### SPECIFICATION

Type	Active DSP-controlled Compact Subwoofer
Frequency Response(-10dB)	26Hz-135Hz
Maximum Calculated	134dB/140dB
SPL/1M(Continuous/Peak)	
LF Driver	Customized 2x18" driver, 4.0"voice coil
DSP	
Processor	48kHz signal sampling frequency
Presets	80Hz, 100Hz, 120Hz
<b>AMPLIFIER</b>	
Amplifier Circuitry	Class D
Power (RMS standards)	2000W
Peak Power	4000W
Frequency Response	20Hz-20kHz(±0.5dB)
(1W 8Ω 2ch)	
Intermodulation Distortion	<0.05%
Total Harmonic Distortion	<0.05%
Cooling System	Cooling with fans, air convection
Protection	DC protection, short circuit protection, overheat protection, input overload protection, output overload protection, soft startup protection, overvoltage protection, undervoltage protection
Signal Input	Female XLR
Signal Output	Male XLR
Power Input	Power connector
AC Power Operating Range	100V-130V~ or 220V-240V~ (±10%.50/60Hz)
Power consumption	237W
(1/8 output power)	
<b>CABINET</b>	
Cabinet Material	CNC machined plywood
Cabinet Color	Black is the default color. Contact Audiocenter for customization
Grille	Iron mesh
Handles	4 side
Pole Mount	M20 base Φ35mm
Speaker Dimension(W×H×D)	1206x565x694mm
Carton Dimensions (W×H×D)	651x1331x780mm
Net Weight	68.0kg
Shipping Weight	74.0kg