


SWATCHBOOK:
COLOR FILTER:
DESCRIPTION:
TRANSMISSION = 68% or -0.6 stop loss
MIREID SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

ROSCOLUX
#14 MED STRAW
 Color Effects Lighting Filter.
 68% or -0.6 stop loss
 Not Applicable.
 Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- 'D65' (daylight)

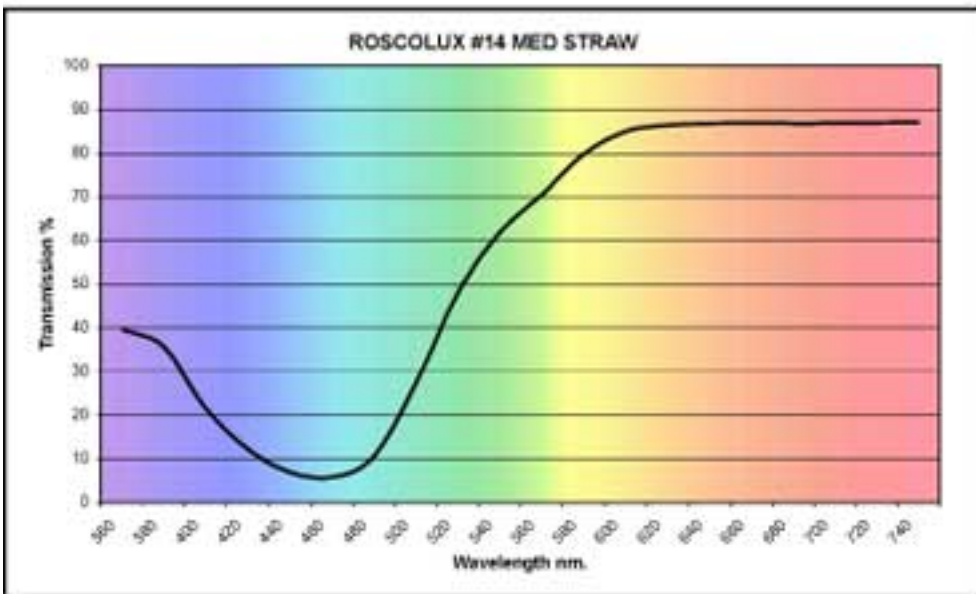


HUNTER LAB SOURCE A	
L*	86.729
A*	16.431
B*	82.809

HUNTER LAB SOURCE D65	
L*	82.302
A*	10.361
B*	78.623

CIE 1964 SOURCE A	
Y	89.455
(x)	0.638
(y)	0.439

CIE 1964 SOURCE D65	
Y	60.857
(x)	0.467
(y)	0.467

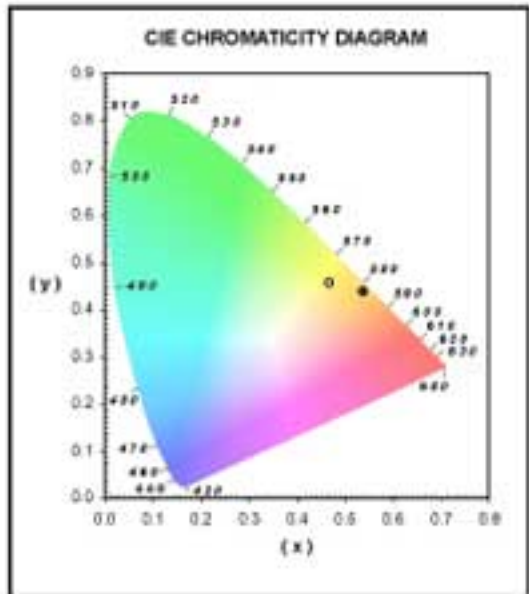

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740	
trans %	40	36	22	12	7	6	11	27	48	62	70	80	85	86	87	87	87	87	87	87	87

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
 Substrate: PC (Polycarbonate)
 Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order