


SWATCHBOOK: ROSCOLUX
COLOR FILTER: #19 FIRE
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 20% or -2.3 stop loss
MIREL SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- ° 'D65' (daylight)

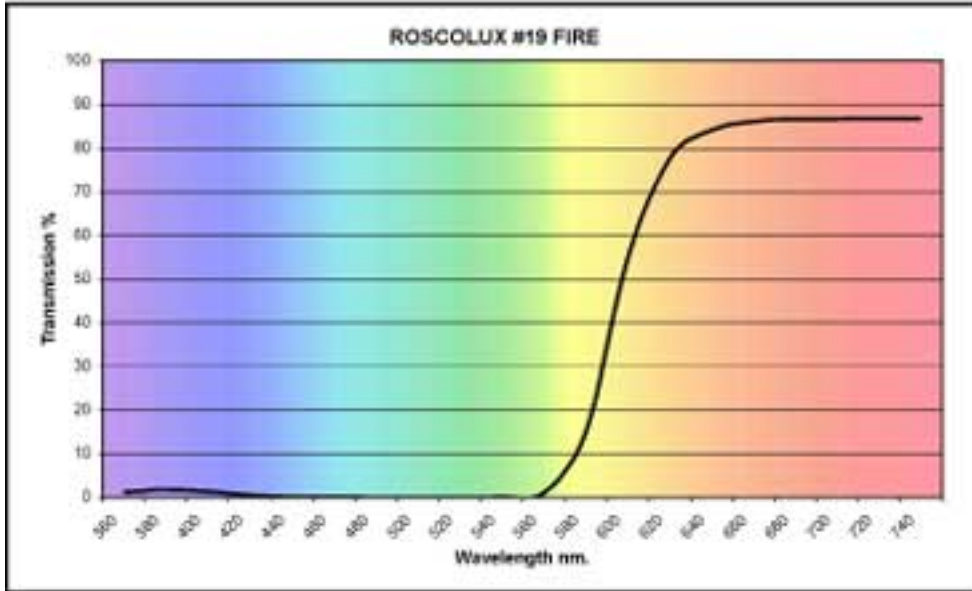


HUNTER LAB SOURCE A	
L*	57.271
A*	66.054
B*	96.357

HUNTER LAB SOURCE D65	
L*	46.509
A*	70.067
B*	77.281

CIE 1964 SOURCE A	
Y	25.201
(x)	0.659
(y)	0.339

CIE 1964 SOURCE D65	
Y	15.648
(x)	0.650
(y)	0.342

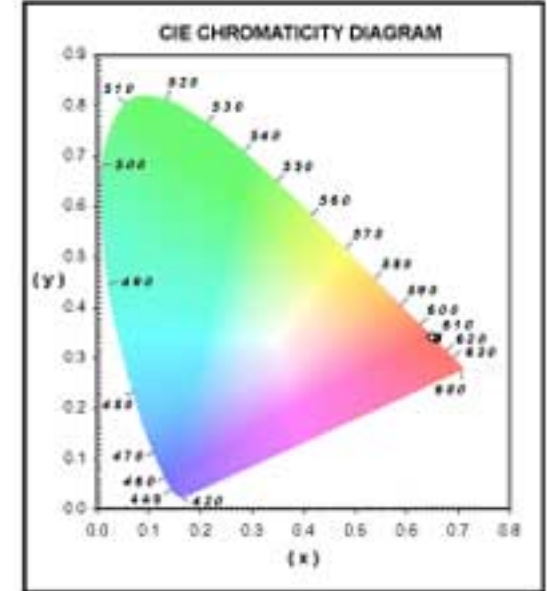

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	1	2	1	1	0	0	0	0	0	0	1	15	54	78	84	86	87	87	87	87

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order