


**SWATCHBOOK:** ROSCOLUX  
**COLOR FILTER:** #11 LT STRAW  
**DESCRIPTION:** Color Effects Lighting Filter.  
**TRANSMISSION =** 82% or -0.3 stop loss  
**MIREL SHIFT =** Not Applicable.  
**CC EQUIVALENT =** Not Applicable.

**COLORIMETRIC DATA**

**OBSERVER:** CIE 1964 10°  
**SOURCE:**

- 'A' (tungsten)
- 'D65' (daylight)

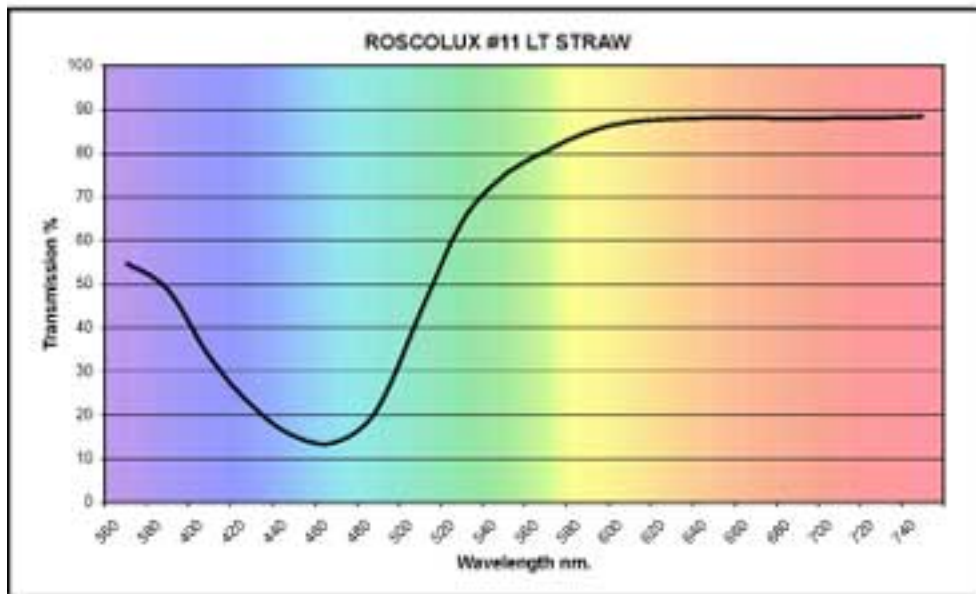


<b>HUNTER LAB SOURCE A</b>	
L*	90.434
A*	8.976
B*	66.399

<b>HUNTER LAB SOURCE D65</b>	
L*	87.201
A*	1.893
B*	63.739

<b>CIE 1964 SOURCE A</b>	
Y	77.244
(x)	0.616
(y)	0.443

<b>CIE 1964 SOURCE D65</b>	
Y	70.417
(x)	0.428
(y)	0.444

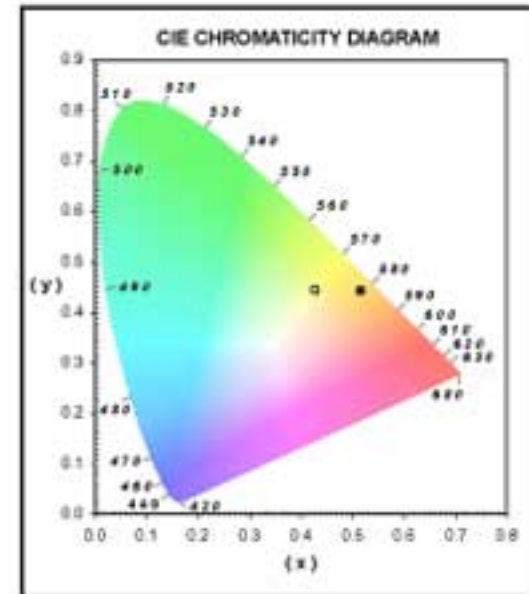

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	55	49	33	22	15	14	21	43	64	75	80	85	87	88	88	88	88	88	88	88

**MATERIAL SPECIFICATIONS:**

**General Description:** Co-extruded Polycarbonate Film  
**Substrate:** PC (Polycarbonate)  
**Thickness:** 3.0 mil (.003" or 76.2 micron)

**Manufactured in:** U.S.A.

**AVAILABLE SIZES:**

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order