


SWATCHBOOK: ROSCOLUX
COLOR FILTER: #313 LIGHT RELIEF YELLOW
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 76% or -0.4 stop loss
MIREID SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- ° 'D65' (daylight)

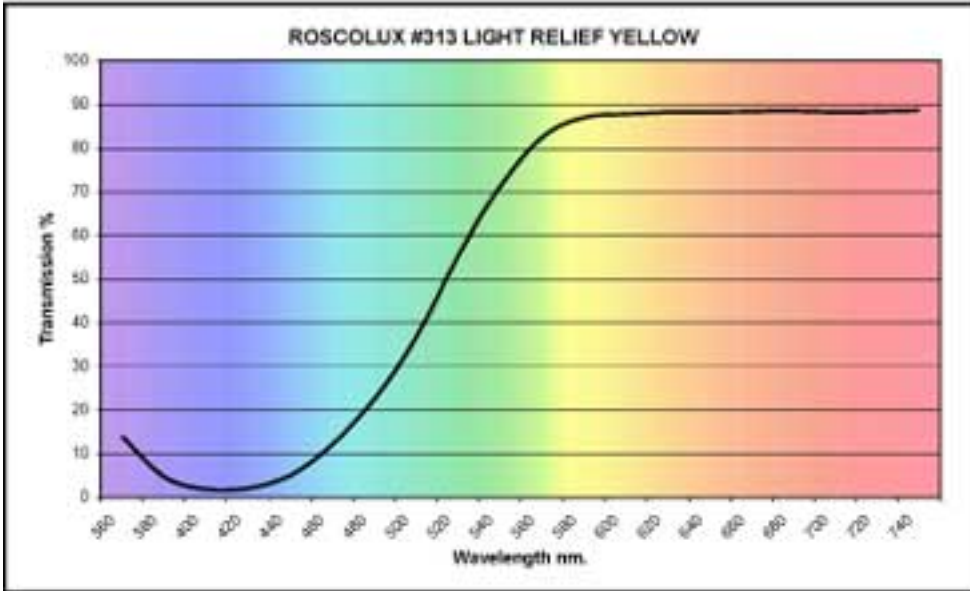


HUNTER LAB SOURCE A	
L*	90.027
A*	11.182
B*	79.415

HUNTER LAB SOURCE D65	
L*	86.262
A*	3.319
B*	79.806

CIE 1964 SOURCE A	
Y	76.340
(x)	0.529
(y)	0.443

CIE 1964 SOURCE D65	
Y	68.512
(x)	0.462
(y)	0.466

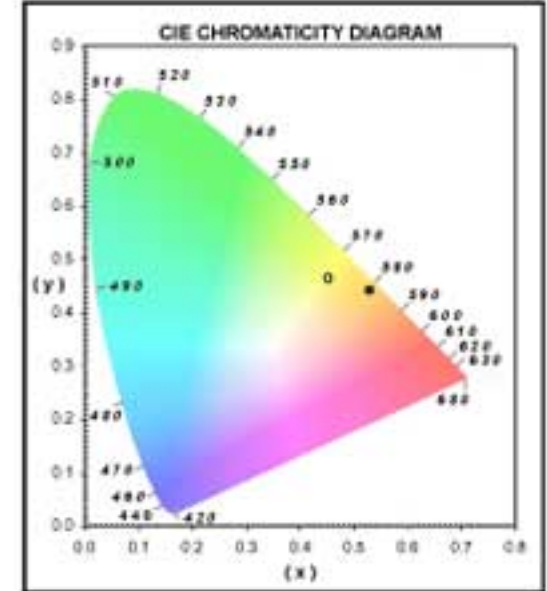

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740	
trans %	14	5	2	2	5	12	22	37	55	71	82	87	88	88	88	88	89	88	88	88	89

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order