


**SWATCHBOOK:**  
**COLOR FILTER:**  
**DESCRIPTION:**  
**TRANSMISSION =** 44% or -1.2 stop loss  
**MIREL SHIFT =** Not Applicable.  
**CC EQUIVALENT =** Not Applicable.

**ROSCOLUX**  
**#72 AZURE BLUE**  
 Color Effects Lighting Filter.

**COLORIMETRIC DATA**

**OBSERVER:** CIE 1964 10°  
**SOURCE:**

- 'A' (tungsten)
- 'D65' (daylight)

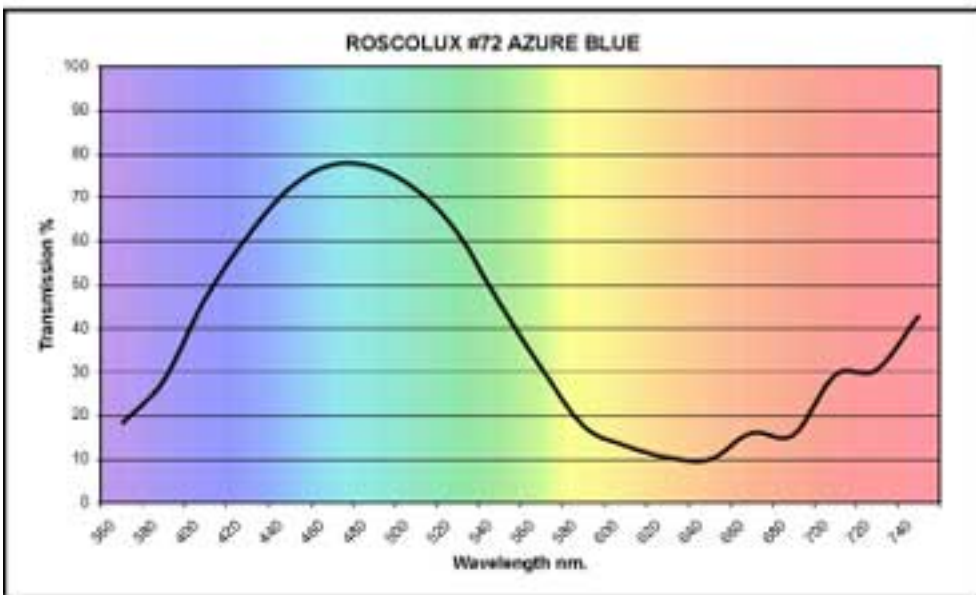


<b>HUNTER LAB SOURCE A</b>	
L*	82.665
A*	-43.637
B*	-44.625

<b>HUNTER LAB SOURCE D65</b>	
L*	69.353
A*	-31.498
B*	-32.645

<b>CIE 1964 SOURCE A</b>	
Y	31.187
(x)	0.284
(y)	0.390

<b>CIE 1964 SOURCE D65</b>	
Y	39.837
(x)	0.196
(y)	0.269

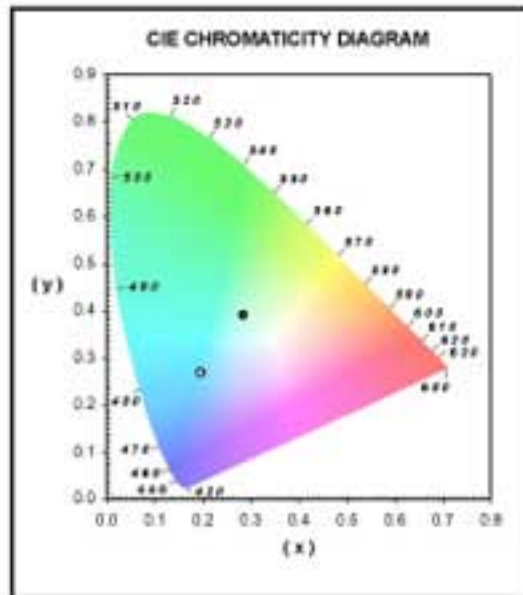

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	18	28	47	61	72	78	77	72	62	46	31	18	13	11	10	16	16	29	31	43

**MATERIAL SPECIFICATIONS:**

**General Description:** Co-extruded Polycarbonate Film  
**Substrate:** PC (Polycarbonate)  
**Thickness:** 3.0 mil (.003" or 76.2 micron)

**Manufactured in:** U.S.A.

**AVAILABLE SIZES:**

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order