


**SWATCHBOOK:** ROSCOLUX  
**COLOR FILTER:** #24 SCARLET  
**DESCRIPTION:** Color Effects Lighting Filter.  
**TRANSMISSION =** 22% or -2.2 stop loss  
**MIREID SHIFT =** Not Applicable.  
**CC EQUIVALENT =** Not Applicable.

**COLORIMETRIC DATA**

**OBSERVER:** CIE 1964 10°  
**SOURCE:**

- 'A' (tungsten)
- ° 'D65' (daylight)

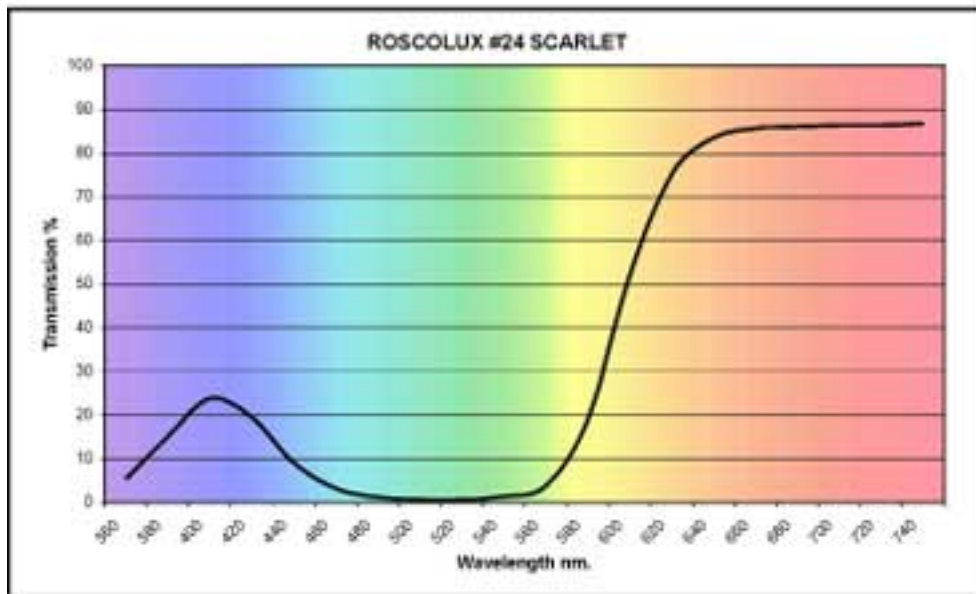


HUNTER LAB SOURCE A	
L*	58.128
A*	63.311
B*	48.707

HUNTER LAB SOURCE D65	
L*	48.196
A*	69.473
B*	26.849

CIE 1964 SOURCE A	
Y	26.096
(x)	0.636
(y)	0.336

CIE 1964 SOURCE D65	
Y	16.949
(x)	0.558
(y)	0.300

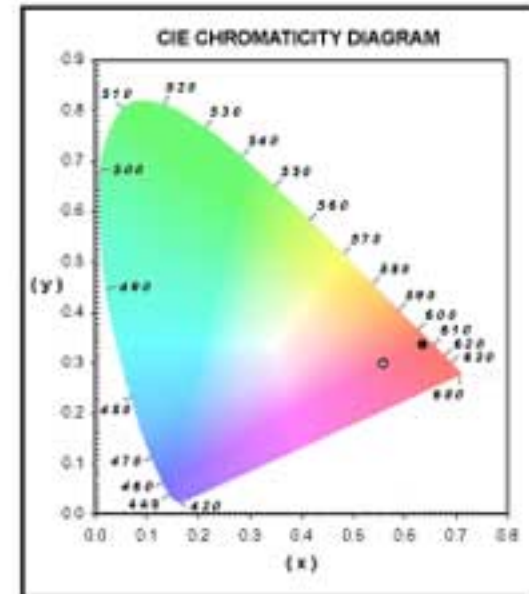

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	5	15	24	20	9	3	1	1	1	1	4	19	52	75	83	86	86	86	86	87

**MATERIAL SPECIFICATIONS:**

**General Description:** Co-extruded Polycarbonate Film  
**Substrate:** PC (Polycarbonate)  
**Thickness:** 3.0 mil (.003" or 76.2 micron)

**Manufactured in:** U.S.A.

**AVAILABLE SIZES:**

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order