


SWATCHBOOK: ROSCOLUX
COLOR FILTER: #356 MIDDLE LAVENDER
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 27% or -1.9 stop loss
MIREL SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- 'D65' (daylight)

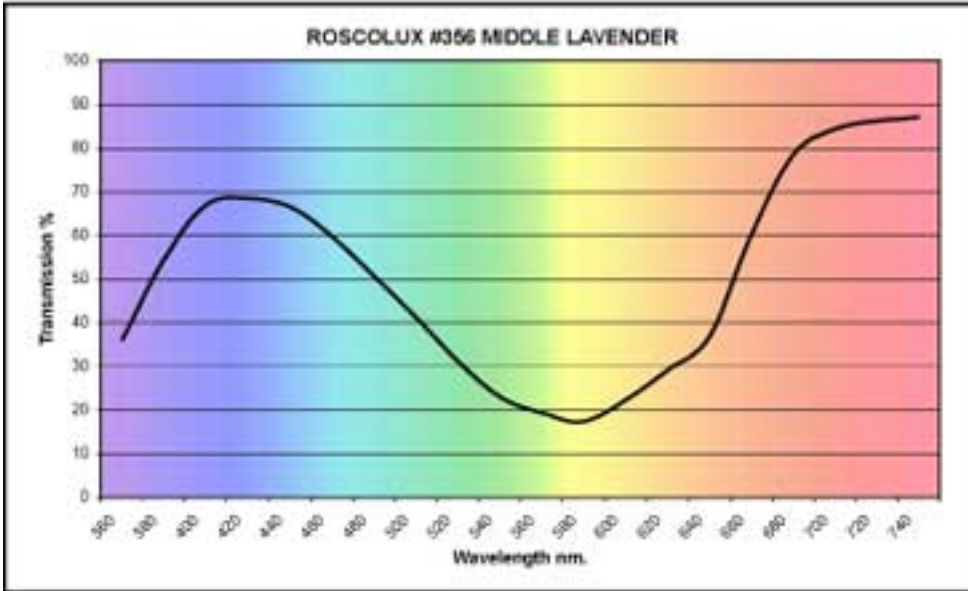


HUNTER LAB SOURCE A	
L*	58.513
A*	8.379
B*	-39.248

HUNTER LAB SOURCE D65	
L*	60.335
A*	13.963
B*	-38.007

CIE 1964 SOURCE A	
Y	26.505
(x)	0.398
(y)	0.336

CIE 1964 SOURCE D65	
Y	28.497
(x)	0.244
(y)	0.227

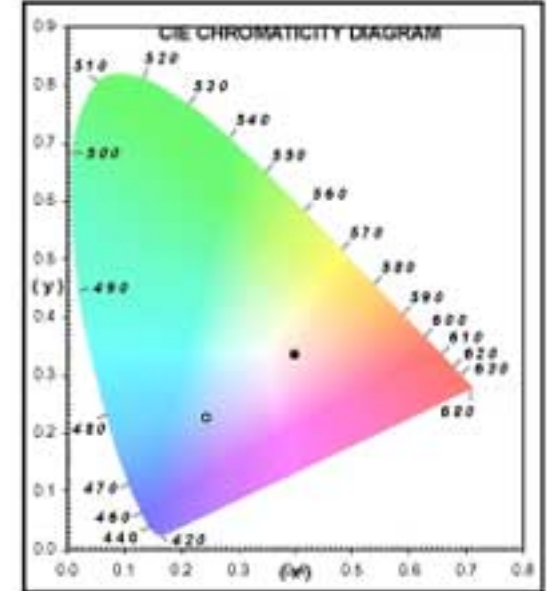

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	36	54	67	69	67	60	51	41	31	23	19	17	22	29	37	60	79	84	86	87

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order