


SWATCHBOOK: ROSCOLUX
COLOR FILTER: #53 PALE LAVENDER
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = 64% or -0.6 stop loss
MIREL SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE:

- 'A' (tungsten)
- 'D65' (daylight)

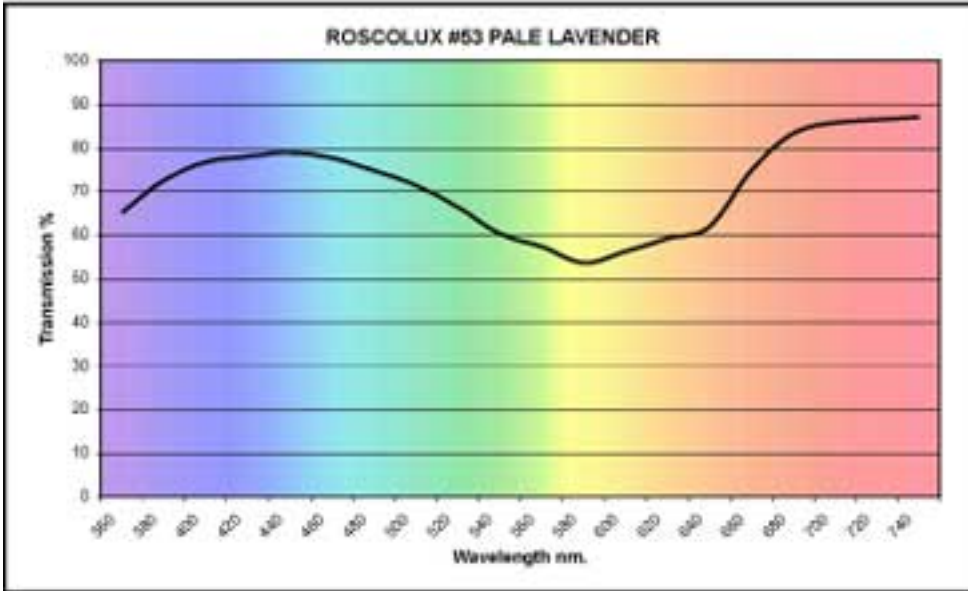


HUNTER LAB SOURCE A	
L*	81.919
A*	-0.892
B*	-14.388

HUNTER LAB SOURCE D65	
L*	82.878
A*	0.26
B*	-13.174

CIE 1964 SOURCE A	
Y	80.149
(x)	0.429
(y)	0.393

CIE 1964 SOURCE D65	
Y	61.933
(x)	0.287
(y)	0.302

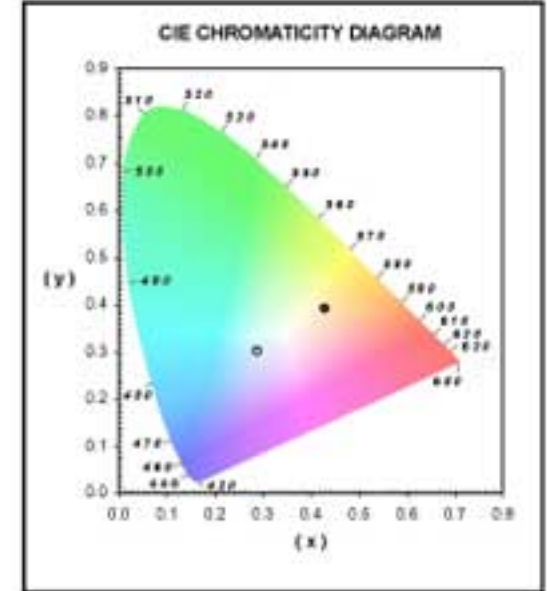

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	65	73	77	78	79	78	75	71	66	61	57	54	56	59	62	75	83	86	87	87

MATERIAL SPECIFICATIONS:

General Description: Co-extruded Polycarbonate Film
Substrate: PC (Polycarbonate)
Thickness: 3.0 mil (.003" or 76.2 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order